

STOP!
For use,
instructions and
customer service
information, see
instruction
manual.

Capacity: 5 lb / 2.2 kg

lb/kg oz/g
0

ON/OFF ON/TARE OFF

pelouze®

Model SP5



Capacity: 5 lb / 2.2 kg

lb/kg

oz/g

117

oz
g


oz/g

ON/TARE

OFF

pelouze®

Model SP5

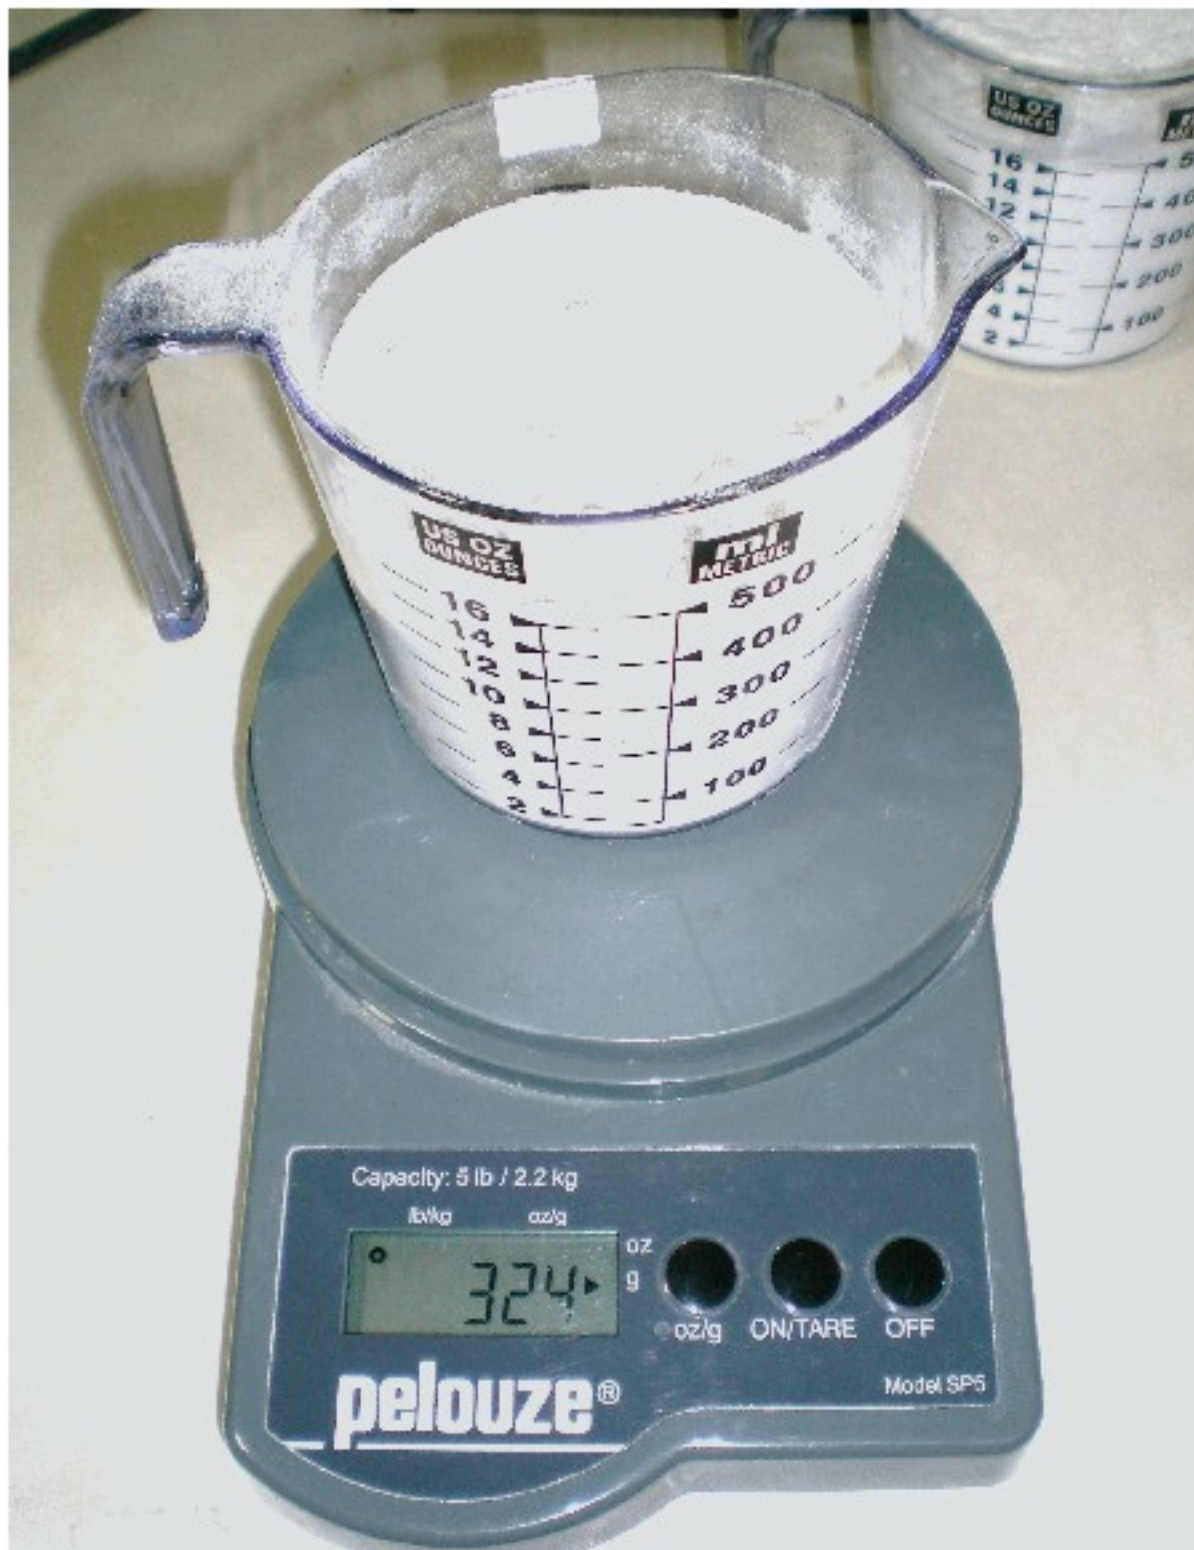



Capacity: 5 lb / 2.2 kg

lb/kg

oz/g

314

oz

g

oz/g

ON/TARE

OFF

pelouze®

Model SP5



		TEST RUN 5/22/2007					
		1 HYTECH	INSULAD	HEATSHIELD	AMBIENT		
		TEMPERATURE	TEMPERATURE	TEMPERATURE	TEMPERATURE	TEMPERATURE	
		VOLUME IN CC	VOLUME IN CC	VOLUME IN CC	VOLUME IN CC		
		500 CC	500 CC	500 CC	500 CC		
		WEIGHT IN GRAMS	WEIGHT IN GRAMS	WEIGHT IN GRAMS	WEIGHT IN GRAMS		
		207 GRAMS	197 GRAMS	42 GRAMS	42 GRAMS		
		4.92% HEAVIER	4.69% HEAVIER				
		TEMP	TEMP	TEMP	TEMP		
		OVER	OVER	OVER	OVER		
		AMBIENT	AMBIENT	AMBIENT	AMBIENT		
09:20 AM	150	77	147	74	133	60	73
09:25 AM	140	66	139	65	121	47	74
09:30 AM	128	51	125	50	108	31	75
09:35 AM	115	40	114	39	95	20	75
09:40 AM	108	32	107	31	90	14	76
09:45 AM	101	25	100	24	86	10	76
09:50 AM	95	19	95	19	84	8	76
09:55 AM	91	14	91	14	83	6	77
10:00 AM	88	12	89	13	82	6	76
10:05 AM	87	10	87	10	81	4	77
10:10 AM	85	8	85	8	81	4	77
10:15 AM	84	7	84	7	80	3	77
10:20 AM		77		74		60	77
10:25 AM		77		74		60	77
10:30 AM	82	77	82	74	80	60	77
AVERAGE TEMP.		592		576		393	1140
		15		15		15	15
OVER AMBIENT		29.47		29.4		28.2	78